Features

High performance illegal copy protection IC

128bits encryption and decryption applied with AES-128

128bits OTP cells for user serial code

IIC Serial Interface, Supporting up to 400 Kbps

3.3V/1.8V Operation Voltage

- 16 MHz OSC

Two Power Mode (Active, Sleep)

Applications

DMB, Navigation


Mobile Phone, PMP, MP3

DVR(PVR), DVDP

Set-Top Boxes (STBs)

Etc.(Most of electronic system using u-Processor)

Pin Configuration

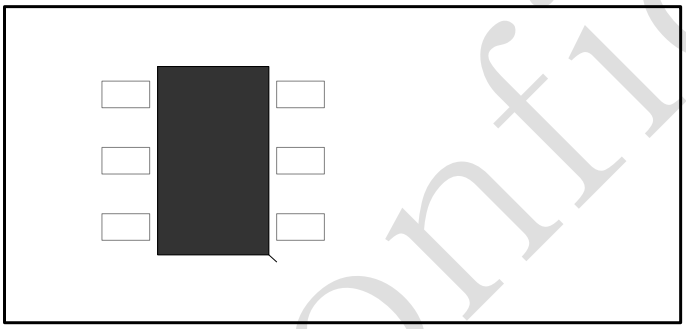

Confidential