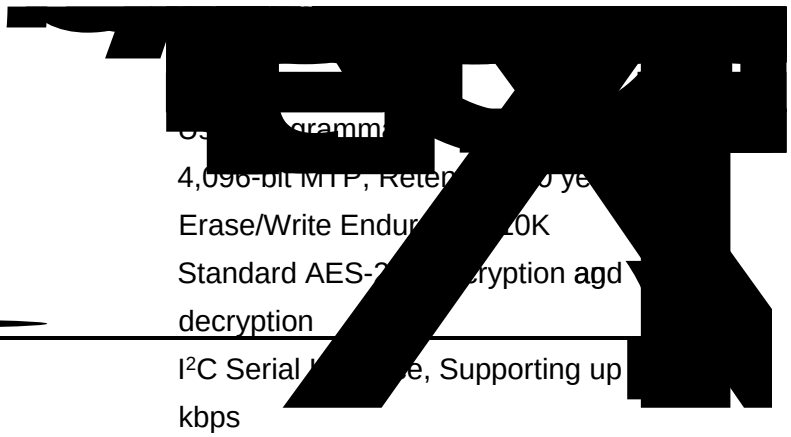


gramm

4,096-bit MTP, Reten yе

Erase/Write Endur 0K

Standard AES-2 ryption and

decryption

I²C Serial e, Supporting up

kbps

Two User Zone Area, UserZone Key, User-Serial, Monotonic Increase Memory, eFuse

Built- in Power on Reset / 6.7MHz OSC

Two Power Mode (Active, Sleep)

Print cart67em "